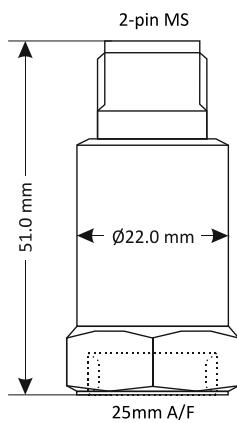


General purpose top-entry constant current accelerometer with isolated AC output. Made from robust stainless steel throughout for long term vibration analysis in harsh environments. Sealed to IP67 and includes 2-pin C5015 military style connector. Available with a wide range of mountings.

MTN/1100



Dimensions



Applications


- Data collection
- Heavy industry
- Paper machinery

Technical


Standard sensitivity	100mV/g $\pm 10\%$ nominal @ 80Hz
Frequency response	2Hz to 10kHz $\pm 5\%$ (-3dB @ 0.8Hz)
Mounted base resonance	18kHz (nominal)
Isolation	Base isolated
Dynamic range	$\pm 80g$
Transverse sensitivity	Less than 5%
Electrical noise	0.1mg max
Current range	0.5 to 8mA
Temperature range	-55 to 140°C
Bias voltage	12V DC (nominal)
Case material	Stainless steel
Mating connector	MTN/MH002
Maximum cable length	100m
Mounting torque	8Nm
Weight	110g (nominal)
Sealing	IP67

Studs and grub screws


Part #	From	To
MS036	1/4"-28 UNF Male	M6 Male
MS039	1/4"-28 UNF Male	10-32 UNF Male
MS067	1/4"-28 UNF Male	M8 Male
MS068	1/4"-28 UNF Male	1/4"-28 UNF Male
MS124	1/4"-28 UNF Male	M10 Male
MS132	1/4"-28 UNF Male	M12 Male

Mounting adapters


Part #	From	To
MS005	Q/F Male	1/4"-28 UNF Female
MS007	Q/F Male	10-32 UNF Female
MS008	Q/F Male	M8 Female
MS011	1/4"-28 UNF Male	Q/F Female
MS013	1/4"-28 UNF Male	Glue base
MS033	1/4"-28 UNF Male	Q/F Female
MS038	Q/F Male	M8 Conical Male
MS061	1/4"-28 UNF Male	10-32 UNF Male
MS079	1/4"-28 UNF Male	Q/F Female
MS106	Q/F Male	M10 Female

Quick fit adapters


Part #	From	To
MS001	Q/F Male	Glue base
MS002	Q/F Male	M8 Male
MS003	Q/F Male	M10 Male
MS004	Q/F Male	1/4"-28 UNF Male
MS006	Q/F Male	M6 Male

Isolation

Part #	From	To
MS034	1/4"-28 UNF Male	1/4"-28 UNF Female
MS093	Q/F Male	M8 Male

Options

- Filters
- Temperature output
- Various connector assemblies
- Other sensitivities (see below)

Part #	Mounting	xx = Optional Sensitivity (mV/g)
MTN/1100-xx	1/4"-28 UNF Female	10 30 50 500 1000
MTN/1100Q-xx	Q/F Female	

System connection
