

ATEX and IECEx Group II certified. General purpose, top-entry, constant current accelerometer with isolated AC output. Made from robust stainless steel throughout for long term vibration analysis in harsh, hazardous gas and dust environments. 3 wire device, requires -24V supply. Sealed to IP67 and includes integral overbraided ETFE cable and is available with a wide range of mountings.

Applications

- General Industry
- Compressors, Pumps, etc
- Oil, Petrochemical, Mining
- API 670

MTN/1109IC

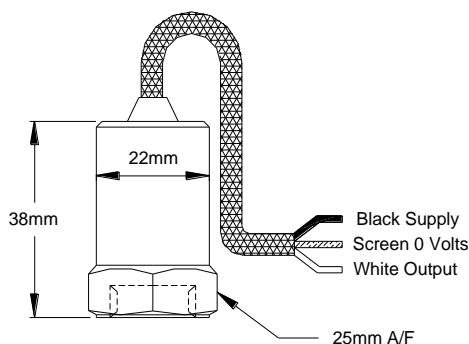


Technical

Standard Sensitivity	100 mV/g +/-10% nominal at 80 Hz
Frequency response	2Hz to 10kHz +/-5% (-3 dB at 0.8 Hz)
Mounted base resonance	18kHz (nominal)
Isolation	Base isolated
Transverse sensitivity	Less than 5%
Electrical Noise	0.1 mg max
Supply Voltage	-24V DC
Bias Voltage	-12 Volts DC (nominal)
Temperature range for	-55 °C to 135 °C
Case material	Stainless steel
Cable	Integral S/S overbraided ETFE
Weight	110 gms (nominal)
Sealing	IP67

Certificate Details

Dimensions



Group II¹

BAS02ATEX1057, EEx ia IIC T4
 Ex II 1GD T45°C

Terminal parameters

Ui = 28V, Ii = 93mA, Pi = 0.65W
 For Ci and Li see certificate


Barrier

1 x MTL5031 Isolator to BAS01ATEX7151 or any
 other barrier that conforms to Note 4 of drawing
 ATX014 (Available on request)




Studs and grub screws


Part #	From	To
MS036	1/4"-28 UNF Male	M6 Male
MS039	1/4"-28 UNF Male	10-32 UNF Male
MS067	1/4"-28 UNF Male	M8 Male
MS068	1/4"-28 UNF Male	1/4"-28 UNF Male
MS124	1/4"-28 UNF Male	M10 Male
MS132	1/4"-28 UNF Male	M12 Male

Mounting adapters


Part #	From	To
MS005	Q/F Male	1/4"-28 UNF Female
MS007	Q/F Male	10-32 UNF Female
MS008	Q/F Male	M8 Female
MS011	1/4"-28 UNF Male	Q/F Female
MS013	1/4"-28 UNF Male	Glue base
MS033	1/4"-28 UNF Male	Q/F Female
MS038	Q/F Male	M8 Conical Male
MS061	1/4"-28 UNF Male	10-32 UNF Male
MS079	1/4"-28 UNF Male	Q/F Female
MS106	Q/F Male	M10 Female

Quick fit adapters


Part #	From	To
MS001	Q/F Male	Glue base
MS002	Q/F Male	M8 Male
MS003	Q/F Male	M10 Male
MS004	Q/F Male	1/4"-28 UNF Male
MS006	Q/F Male	M6 Male

Isolation

Part #	From	To
MS034	1/4"-28 UNF Male	1/4"-28 UNF Female
MS093	Q/F Male	M8 Male

Barrier Connection (For more detailed connection information please request system drawing ATX014)

Part #	Mounting	xx = Optional Sensitivity Range Available
MTN/1109IC-xx	1/4" UNF Female	0-10 mV/g 0-30 mV/g 0-50 mV/g
MTN/1109ICQ-xx	Q/F Female	

