

ATEX and IECEx Group I certified. General purpose, top-entry velocity transducer with DC output. Made from robust stainless steel throughout for continuous vibration monitoring in harsh industrial environments. Sealed to IP67 with industry standard two-wire 4-20mA output proportional to sensor range that can connect directly to PLC, DCS and other industrial controllers. Includes integral stainless steel overbraided ETFE cable and is available with a wide range of mountings.


## Applications

- Intrinsically safe data collector
- Oil & mining
- Fans, compressors, pumps etc

## MTN/M2285IC



## Dimensions

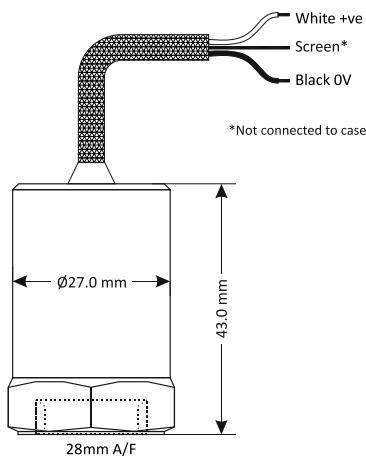

## Technical

Output current	4-20mA DC proportional to rms velocity (mm/s)
Supply voltage	12-32V DC (4-20mA)
Frequency response	2Hz to 1kHz ±10%
Mounted base resonance	5kHz (nominal)
Isolation	Electronics in Faraday cage, isolated from body
Dynamic range	50g peak
Temperature sensitivity	0.08%/ <sup>°</sup> C
Transverse sensitivity	Less than 5%
Temperature range	-55 <sup>°</sup> C ≤ Ta ≤ +115 <sup>°</sup> C
Case material	Stainless steel
Cable	Integral stainless steel overbraided ETFE
Standard cable length	5m
Maximum cable length	See system drawing ATX038
Mounting torque	8Nm
Weight	150g (nominal)
Sealing	IP67

## Certificate Details

Group I	BAS02ATEX0245X and IECEx BAS 08.0013X Ex ia I Ma (-55 <sup>°</sup> C ≤ Ta ≤ +115 <sup>°</sup> C)
Terminal parameters	Ui = 28V, Ii = 93mA, Pi = 0.65W For Ci and Li see certificate
Barrier	MTL7787+, BAS01ATEX7217 or P&FZ787, BAS01ATEX7005 or any other barrier that conforms to note 4 of ATX038 (Available on request)




## Studs and grub screws




Part #	From	To
MS036	1/4"-28 UNF Male	M6 Male
MS039	1/4"-28 UNF Male	10-32 UNF Male
MS067	1/4"-28 UNF Male	M8 Male
MS068	1/4"-28 UNF Male	1/4"-28 UNF Male
MS124	1/4"-28 UNF Male	M10 Male
MS132	1/4"-28 UNF Male	M12 Male

## Mounting adapters



Part #	From	To
MS005	Q/F Male	1/4"-28 UNF Female
MS007	Q/F Male	10-32 UNF Female
MS008	Q/F Male	M8 Female
MS011	1/4"-28 UNF Male	Q/F Female
MS013	1/4"-28 UNF Male	Glue base
MS033	1/4"-28 UNF Male	Q/F Female
MS038	Q/F Male	M8 Conical Male
MS061	1/4"-28 UNF Male	10-32 UNF Male
MS079	1/4"-28 UNF Male	Q/F Female
MS106	Q/F Male	M10 Female

## Quick fit adapters



Part #	From	To
MS001	Q/F Male	Glue base
MS002	Q/F Male	M8 Male
MS003	Q/F Male	M10 Male
MS004	Q/F Male	1/4"-28 UNF Male
MS006	Q/F Male	M6 Male

## Isolation


Part #	From	To
MS034	1/4"-28 UNF Male	1/4"-28 UNF Female
MS093	Q/F Male	M8 Male

## Options

- Filters
- Mounting threads
- Other cable lengths
- Other velocities (see below)

Part #	Mounting	xx = Optional velocity (mm/s rms)
MTN/M2285IC-xx	1/4" UNF Female	0-10 0-20 0-25 0-50 0-100
MTN/M2285ICQ-xx	Q/F Female	

## System connection

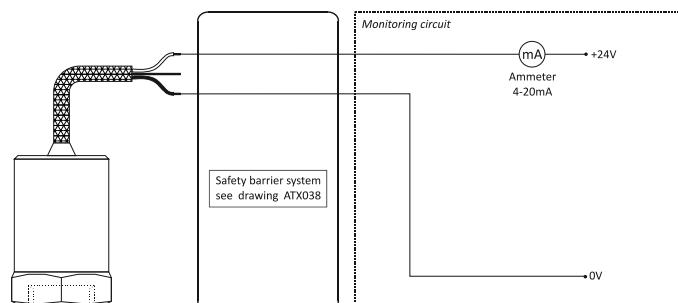

*Note: Care should be taken not to install this in a high velocity dust laden atmosphere.*